REF	DESCRIPTION
1	USB CONNECTION FOR TEMPERATURE LOGGING
2	18 GA. S/S INTERIOR & EXTERIOR – TYPE 304 – #4 FINISH
3	LCD TEMPERATURE DISPLAY WITH TOUCHSCREEN CONTROLS
4	OVER TEMPERATURE AUDIBLE ALARM
5	CIRCUIT BOARD WITH TOUCHSCREEN CONTROLS
6	9 FT HOSP. GRADE CORD & PLUG (CAN BE REMOVED FOR HARDWIRING)
7	"OVER TEMPERATURE" DISPLAY SET AT 180° F AT FACTORY
8	AIR CIRCULATING FAN
9	TEMPERATURE SETTING BUTTON
10	FIBERGLASS INSULATION
11	WIRE SHELF
12	TWO (2) ELECTRICAL HEATERS (275 WATTS EACH)
13	CHROME PLT'D. EDGEMOUNT HINGES
14	CHROME PLT'D. EDGEMOUNT MAGNETIC LATCH W/ BLK. PHENOLIC HANDLE
15	HEAT RESISTANT DOOR GASKET
16	TOUCHSCREEN CONTROL PANEL
17	TOP PANEL
18	S/S PERFORATED HEATER GUARD
19	PILASTER STRIPS FOR SHELF ADJUSTMENT
20	(4) .25 DIA. MOUNTING HOLES (BOTH END PANELS)
21	S/S ANGLED TRIM (BOTH SIDES)
22	SOLID DOORS (BOTH SIDES)

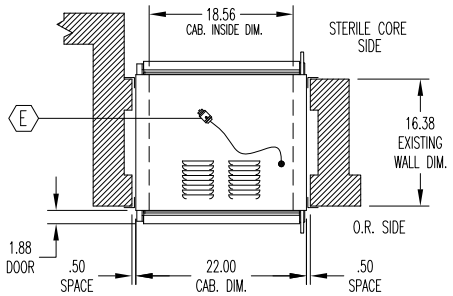

PLAN

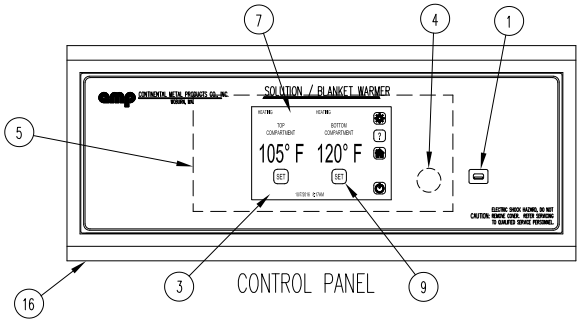

CONTROL PANEL

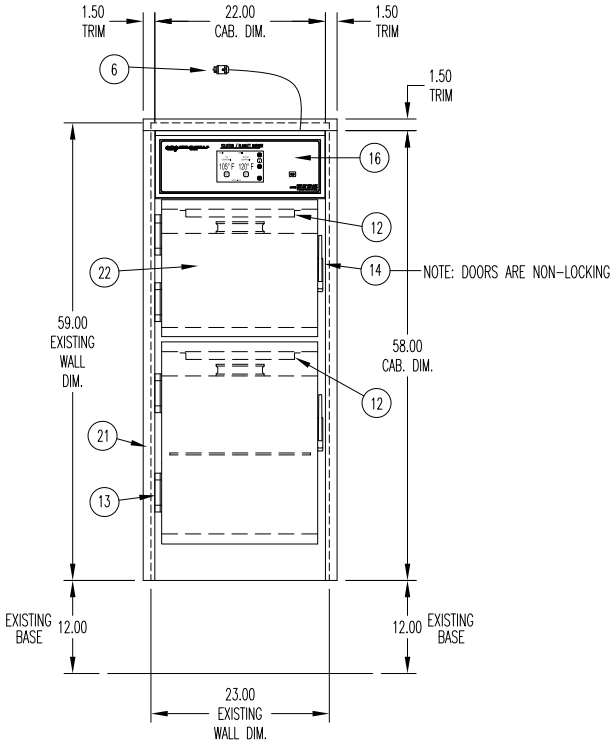

ELEVATION
O.R. SIDE
MODEL DSW2AE-2258-18-PT

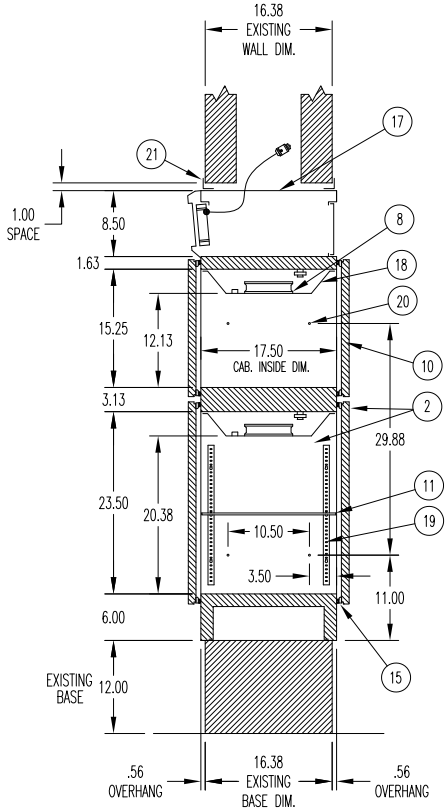

SECTION

MODEL DSW2AE-2258-18-PT
PLACED INTO EXISTING WALL OPENING
WARMING CABINET WEIGHT: 275 LBS
UPPER COMPARTMENT STORAGE: 2.28 CU. FT.
LOWER COMPARTMENT STORAGE: 3.83 CU. FT.

REQUIRED SERVICES	
E	120V.–60HZ.–1PH .– 7 AMPS. W/ CORD & PLUG (CAN BE REMOVED FOR HARDWIRING) – DEDICATED CIRCUIT

NOTE: MAXIMUM HEAT LOSS 800 BTU/HR.

COMPARTMENT COMPARISONS (CMP VS STERIS):
CMP UNIT UPPER COMPARTMENT: 12.13 H x 18.56 W x 17.50 D – 2.28 CU. FT.
STERIS UNIT UPPER COMPARTMENT: 12.25 H x 19.00 W x 15.25 D – 2.05 CU. FT.
CMP UNIT LOWER COMPARTMENT: 20.38 H x 18.56 W x 17.50 D – 3.83 CU. FT.
STERIS UNIT LOWER COMPARTMENT: 24.38 H x 19.00 W x 15.25 D – 4.09 CU. FT.
CMP TOTAL STORAGE: 6.11 CU. FT.
STERIS TOTAL STORAGE: 6.14 CU. FT.

REVISIONS		
NO.	DATE	BY

CONTINENTAL METAL PRODUCTS CO., INC.
35 OLYMPIA AVE. – WOBURN, MA. 01801

DIGITAL WARMING CABINET, PASS-THROUGH, TWO COMP'T. HEAT
MODEL NO. DSW2AE-2258-18-PT W/ TOUCHSCREEN

SCALE: 1"=12"	DATE: 06/13/2025	DRAWN: PM
SHEET: 1 OF 1	SYS AC	DWG NO. ACC-2211-1 REV